


CYL. LOCK LOCATIONS-DOORS-ALL SERIES

GOVT. 161 LOCK LOCATIONS FROM TOP TO LATCH BOLT CUTOUT

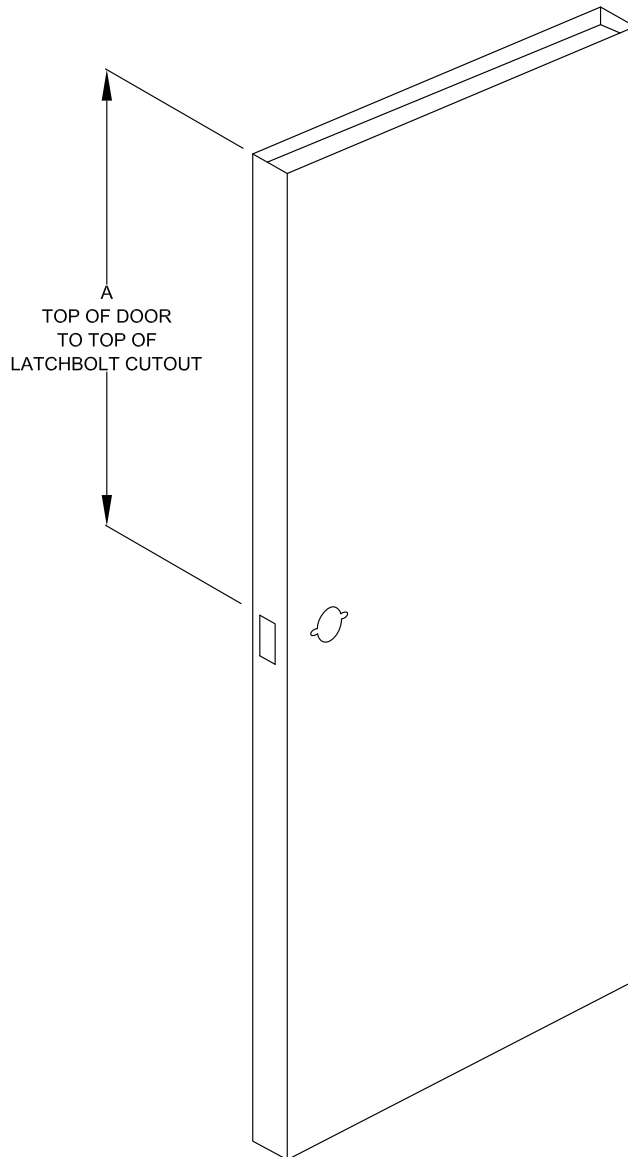

* LOCK LOCATION CONFORMS TO
STANDARD STRIKE LOCATION
OF 38" ϕ FROM BOTTOM
OF FRAME.

DOOR OPENING HEIGHT	CYLINDRICAL LOCK GOV'T 161 ANSI A156.115 A*
6'-0"	32-3/4"
6'-2"	34-3/4"
6'-4"	36-3/4"
6'-6"	38-3/4"
6'-8"	40-3/4"
6'-10"	42-3/4"
7'-0"	44-3/4"
7'-2"	46-3/4"
7'-4"	48-3/4"
7'-6"	50-3/4"
7'-8"	52-3/4"
7'-10"	54-3/4"
8'-0"	56-3/4"
8'-2"	58-3/4"
8'-4"	60-3/4"
8'-6"	62-3/4"
8'-8"	64-3/4"
8'-10"	66-3/4"
9'-0"	68-3/4"
9'-2"	70-3/4"
9'-4"	72-3/4"
9'-6"	74-3/4"
9'-8"	76-3/4"
9'-10"	78-3/4"
10'-0"	80-3/4"
10'-2"	82-3/4"
10'-4"	84-3/4"
10'-6"	86-3/4"
10'-8"	88-3/4"
10'-10"	90-3/4"
11'-0"	92-3/4"
11'-2"	94-3/4"
11'-4"	96-3/4"
11'-6"	98-3/4"
11'-8"	100-3/4"
11'-10"	102-3/4"
12'-0"	104-3/4"