


## SERIES PIOCANE -50

+/- 50 PSF HURRICANE RATED FULL GLASS DOOR ASSEMBLY

SERIES PIOCANE-: ; -50 - FL#1444\*

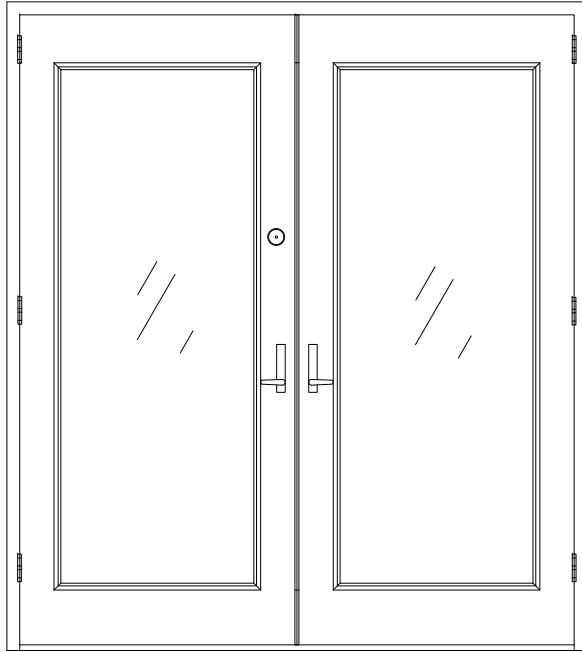

### SPECIFICATION FOR HVHZ AND WIND BORNE DEBRIS AREAS

1. TESTED IN ACCORDANCE WITH TAS 201, TAS 202, TAS 203
2. MAXIMUM FRAME SIZE: 8'-0" X 8'-0"
3. FRAME SERIES: F16 WELDED OR KD FOR WELDING.
4. ANCHORS: MASONRY OR EXISTING OPENING ANCHORS
5. DOOR SERIES: H18, HP18 OR HT18
6. DOOR SIZE: SINGLE -4'-0" X 8'-0"; PAIR 8'-0" X 8'-0"
7. DOOR GLAZING: 7/16" LAMINATED . MAXIMUM TESTED SIZE: FG ( MAX 32" X 72")
8. VISIT [WWW.FLORIDABUILDING.ORG](http://WWW.FLORIDABUILDING.ORG) FOR ADDITIONAL HARDWARE DETAILS

### SPECIFICATION FOR INLAND AND NON-IMPACT AREAS

1. TESTED IN ACCORDANCE WITH TAS 202-94
2. MAXIMUM FRAME SIZE: 8'-0" X 8'-0"
3. FRAME SERIES: F16 WELDED OR KD FOR WELDING
4. ANCHORS: MASONRY OR EXISTING OPENING ANCHORS
5. DOOR SERIES: H18, HP18 OR HT18
6. DOOR SIZE: SINGLE -4'-0" X 8'-0"; PAIR 8'-0" X 8'-0"
7. DOOR GLAZING: ¼" WIRED GLASS . MAXIMUM TESTED SIZE: FG(MAX 32" X 72")
8. VISIT [WWW.FLORIDABUILDING.ORG](http://WWW.FLORIDABUILDING.ORG) FOR ADDITIONAL HARDWARE DETAILS